



The gentle picker for turkeys and broilers ... Gent-L-Flex GTF

The Gent-L-Flex removes up to 90% of all feathers the gentle way! This first position picker all but eliminates breakage; in fact most Gent-L-Flex users report no breakage at all! The unique picker has earned the respect of the entire poultry industry with its efficiency and long-time dependability.

The Gent-L-Flex GTF is available in compact five or ten-foot lengths, each with your choice of two or three banks. Our current model contains the new two-spindle gear boxes and screw-on drums, all meeting high quality standards. The patented gear boxes have an oil bath gear drive assuring smooth, quiet performance at constant RPM. They can be changed quickly and easily to keep down-time to a minimum.

The Gent-L-Flex Picker is engineered, designed and manufactured by craftsmen dedicated to quality, service and reliability and backed by highly trained factory and field service representatives dedicated to the highest level of customer support.





FoodCraft Equipment Co., Inc.
53 Industrial Circle, Lancaster, PA 17601
Phone 717-656-0401
Fax 717-656-0549

POULTRY GENT-L-FLEX PICKER
MODEL GENT-L-FLEX

American Made to Meet American Standards

The Gent-L-Flex Picker is engineered to exact quality standards and constructed with durable stainless steel and aluminum.

Consistent Performance and Results

Each gearbox on the Gent-L-Flex Picker is fully tested prior to shipping to ensure that every customer receives a flawless product capable of producing consistent results for many years to come.

FEATURES

- Stainless Steel and Aluminum Construction
- USDA Approved Materials Used
- Built-In Hydraulic System
- All Components Fully Tested Prior To Shipping
- High Quality OEM Replacement Parts
- 5' Model: 12 - Two Spindle Gearboxes
10' Model: 24 - Two Spindle Gearboxes
- Highly Trained, Seasoned Service Personnel Strategically Located for Prompt Response
- FoodCraft Carries a Complete Stock of Parts and Components for Every Machine We Manufacture


SPECIFICATIONS

Dimensions

- Overall Length - 5' 8'3" (2.5 m)
- Overall Length - 10' 7'6" (2.28m)
- Overall Width 6'0" (1.8m)
- Overall Height 5'2" (1.57m)

Utility Requirements

- **Electric**
5' Model: 6 - 3 HP/230-460V/60HZ,
3 PH/1750 RPM
10' Model: 12 - 3 HP/230-460V/60 HZ,
3 PH/1750 RPM
- **Water**
2 - 1" Drops @ House Pressure
55-60° - Regular Scald / 90° - Hard Scald

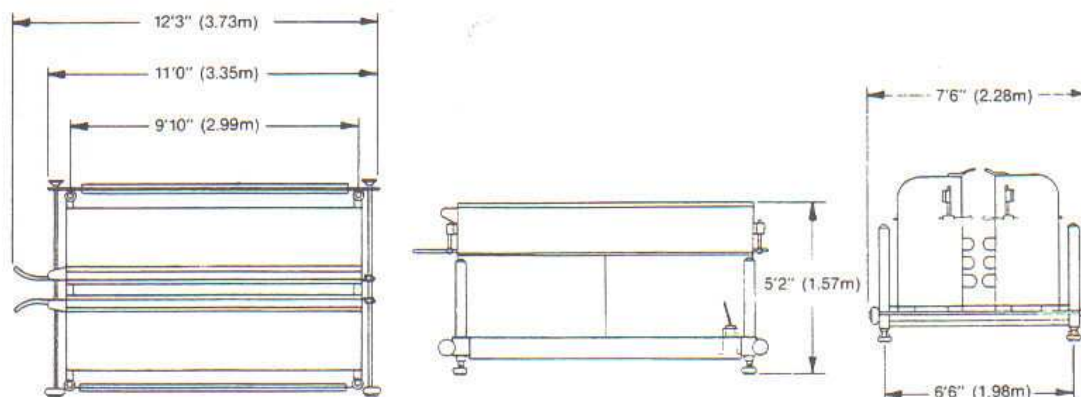

10' Standard Cabinet
Drawings are for layout purposes only.